

2 / 8

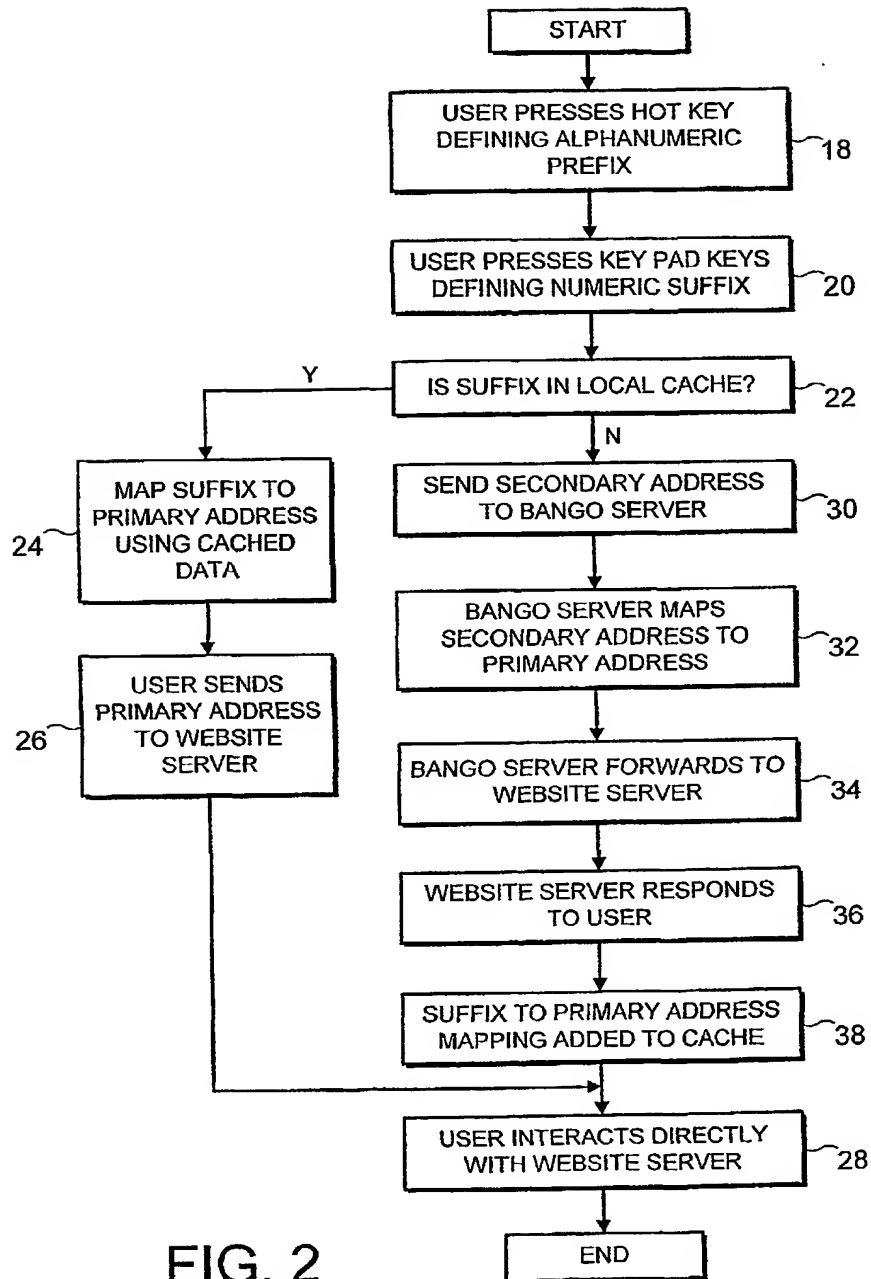


FIG. 2

Bango.net Server {www.bango.net/}

<u>Suffix</u>	Mapping →	<u>Primary Address</u>
1		microsoft.com
.		
.		
.		
007		jamesbond.com
.		
.		
123		dominopizza.co.uk
.		
.		
911		us.porsche.com/english/911/ models/default.htm
.		
.		
.		
02380 178946		localshop.co.uk
.		
.		
.		
.		

Suffix indexes
into databse

FIG. 3

4 / 8

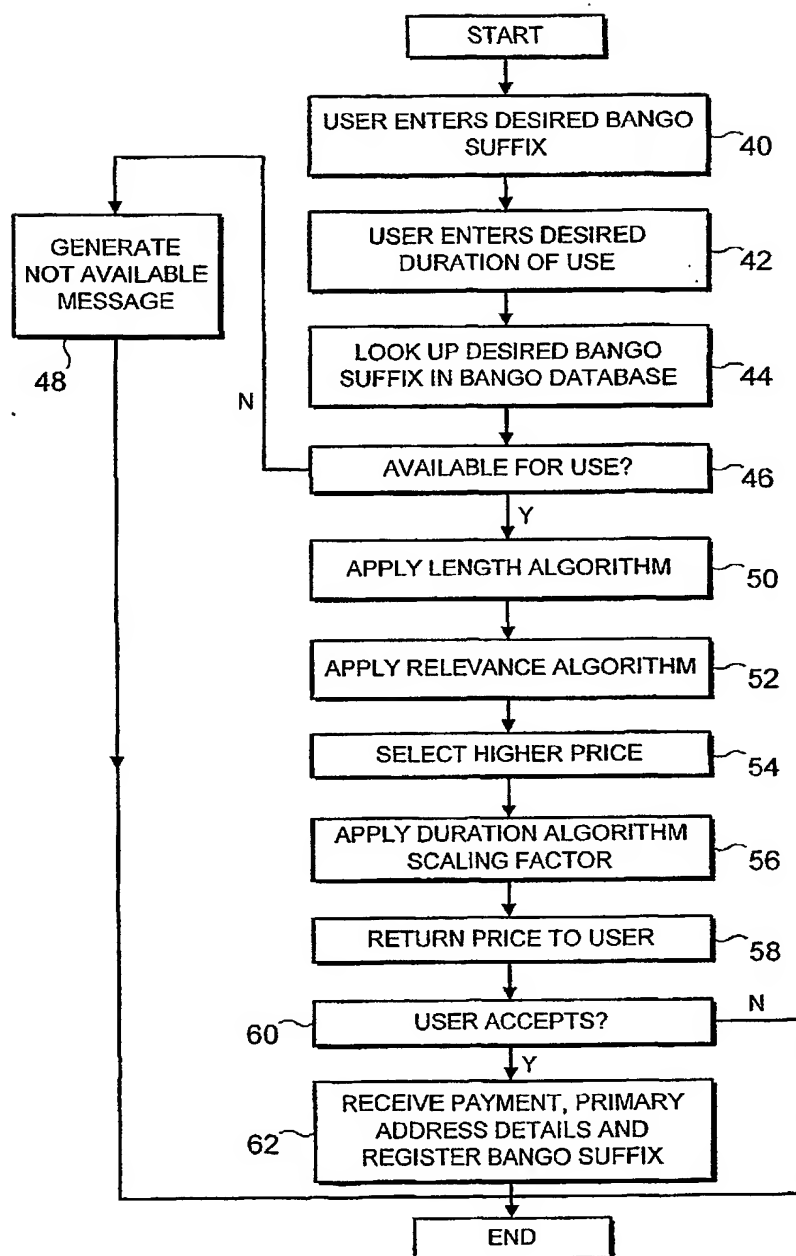


FIG. 4

5 / 8

Length Algorithm

<u>Length</u>	<u>Price US \$</u>
1	5000
2	5000
3	10000
4	7500
5	6000
6	5000
7	4286
8	3750
9	3333
10	3000
>10	2000

64

FIG. 5

6 / 8

Length Algorithm

<u>Predetermined List</u>	<u>Price US \$</u>
.	
.	
007	50000
.	
.	
123	25000
234	20000
345	20000
.	
.	
911	35000
.	
.	
1234	20000
.	
.	
.	

FIG. 6

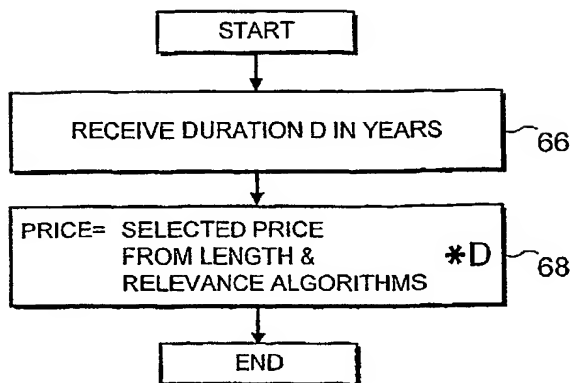


FIG. 7

SUBSTITUTE SHEET (RULE 26)

7 / 8

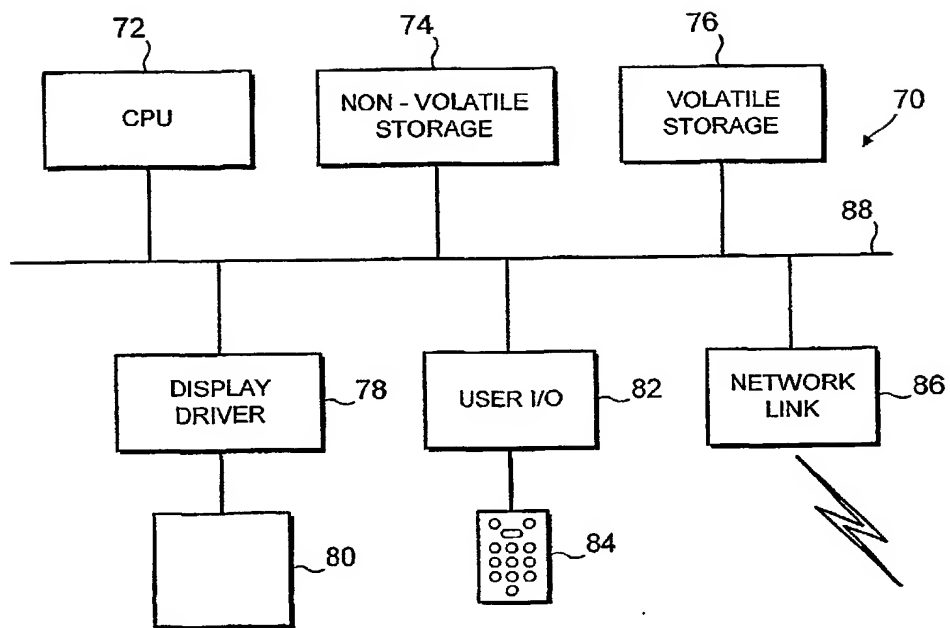


FIG. 8

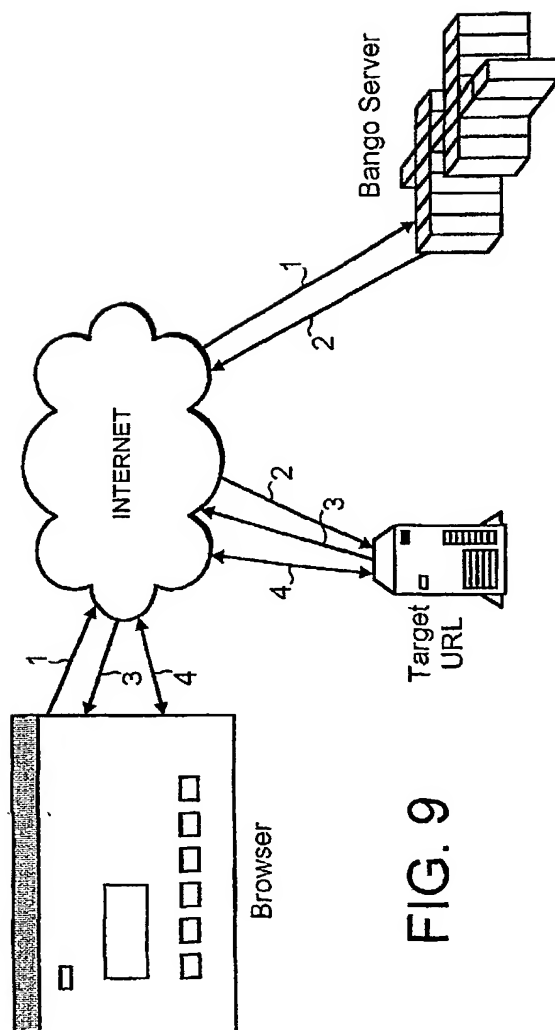


FIG. 9